


# SharkBite Max™

## Braided Connector Hose

SharkBite Max™ allows users to connect pipe with ease - no tools needed. This new design features a stainless steel retainer for extra strength, higher pressure ratings and a lower insertion force than previous versions of SharkBite Brass Push-to-Connect fittings. SharkBite Max fittings do not require a PEX stiffener and are compatible with PEX, copper, CPVC, PE-RT and HDPE\*.

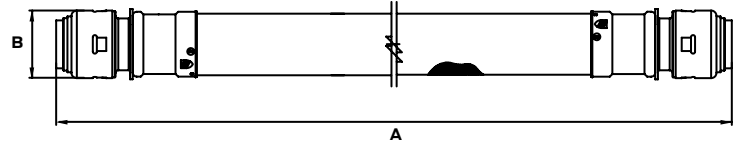

### Applications

Residential and commercial potable water, recirculation, hydronic heating/cooling (up to 50% glycol concentration) and direct burial.

### Specification Data

#### Materials

Body	Lead-Free DZR Brass
O-ring	EPDM
Steel Retainer	304 Stainless Steel
Grab Ring	Stainless Steel
Dielectric Ring	POM
Tube	Stainless Steel
Face Seal	EPDM

#### Pipe Insertion Depth

Fitting Size	Insertion Depth
1/2"	1.00 in.
3/4"	1.25 in.

#### Performance

Max Working Pressure	
Max Pressure	200 psi
Max Temperature	140°F (60°C)

#### Dimensions (inches)

Part #	Size	A	B
UR3008FX12	1/2" x 1/2"	12.0	1.0
UR3008FX18	1/2" x 1/2"	18.0	1.0
UR3016FX12	3/4" x 3/4"	12.0	1.3
UR3016FX18	3/4" x 3/4"	18.0	1.3
UR3068FX12	1/2" x 3/4" FIP	12.0	1.3
UR3068FX18	1/2" x 3/4" FIP	18.0	1.3
UR3068FX24	1/2" x 3/4" FIP	24.0	1.3
UR3086FX24	3/4" x 1" FIP	24.0	1.3
UR3088FX12	3/4" x 3/4" FIP	12.0	1.3
UR3088FX15	3/4" x 3/4" FIP	15.0	1.3
UR3088FX18	3/4" x 3/4" FIP	18.0	1.3
UR3088FX24	3/4" x 3/4" FIP	24.0	1.3
UR3568FX12	1/2" x 3/4" FNPT	12.0	1.3
UR3568FX18	1/2" x 3/4" FNPT	18.0	1.3
UR3588FX12	3/4" x 3/4" FNPT	12.0	1.3
UR3588FX18	3/4" x 3/4" FNPT	18.0	1.3
UR3588FX24	3/4" x 3/4" FNPT	24.0	1.3

### Certifications & Listings

ASME A112.18.6/CSA B125.6, NSF/ANSI 14, NSF/ANSI/CAN 61, NSF/ANSI/CAN 372

For listing information, please contact Customer Service

\* HDPE installations must use a tube stiffener. Sold separately by HDPE manufacturer.

#### Product Submittal

Name	
Date	
Architect/Owner	
Contractor	
Tag	
Notes	