

# SharkBite Max™

## Corrugated Water Heater Connector

SharkBite Max™ allows users to connect pipe with ease - no tools needed. This new design features a stainless steel retainer for extra strength, and a lower insertion effort than previous of SharkBite Brass Push-to-Connect fittings. SharkBite Max fittings do not require a PEX stiffener and are compatible with PEX, copper, CPVC, PE-RT and HDPE\*.

### Applications


Residential and commercial potable water, recirculation, hydronic heating/cooling (up to 50% glycol concentration) and direct burial (wrapping required).

### Specifications Data

Materials	
Body	Lead-Free DZR Brass
O-ring	EPDM
Steel Retainer	304 Stainless Steel
Grab Ring	316 Stainless Steel
Dielectric Ring	POM
Tube	Stainless Steel
Face Seal	EPDM

Pipe Insertion Depth	
Fitting Size	Insertion Depth
1/2"	1.00 in.
3/4"	1.25 in.

Performance	
Max Working Pressure	
Max Pressure	200 psi
Max Temperature	180°F (82°C)

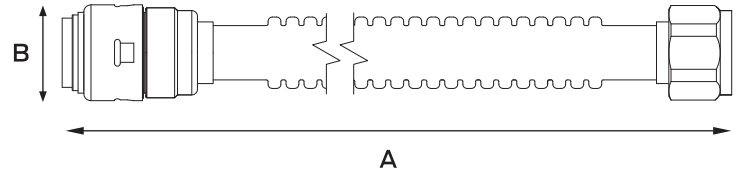

Dimensions (inches)			
Part #	Size	A	B
URSS3088FX12	3/4" x 3/4" FIP	12	1.3
URSS3088FX18	3/4" x 3/4" FIP	18	1.3
URSS3088FX24	3/4" x 3/4" FIP	24	1.3

### Certifications & Listings

ASME A112.18.6/CSA B125.6, NSF/ANSI 14, NSF/ANSI/CAN 61, NSF/ANSI/CAN 372

For listing information, please contact Customer Service

\* HDPE installations must use a tube stiffener. Sold separately by HDPE manufacturer.

Product Submittal	
Name	
Date	
Architect/Owner	
Contractor	
Tag	
Notes	