

SharkBite™

Copper Stub-out

SharkBite™ expansion fittings are designed for use with PEX-a tubing and must be used in conjunction with SharkBite expansion rings. SharkBite expansion fittings have a 25-year system warranty when used with SharkBite PEX-a tubing.

Approved Applications

Residential and commercial potable water, recirculation, reclaimed water systems, hydronic heating/cooling (up to 50% glycol concentration) and direct burial.

Specification Data

Materials

Stub-Out	Copper
Fitting	Lead-Free DZR Brass
Bracket	Copper

Performance

Max Working Pressure

80 psi	at	200°F
100 psi	at	180°F
160 psi	at	73.4°F


Minimum Length of Pipe Connecting Two Fittings

Fittings/Pipe Size	Min. Length	Insertion Depth
1/2 in.	2 in.	0.72 in.
3/4 in.	2-1/2 in.	0.97 in.
1 in.	3 in.	1.19 in.
1-1/4 in.	4-1/2 in.	1.46 in.
1-1/2 in.	4-1/2 in.	1.72 in.
2 in.	6 in.	2.17 in.

Certifications & Listings

ASTM F1960, ASTM F877, CSA B137.5, NSF/ANSI 14, NSF/ANSI/CAN 61, NSF/ANSI/CAN 372

For listing information, please contact Customer Service.

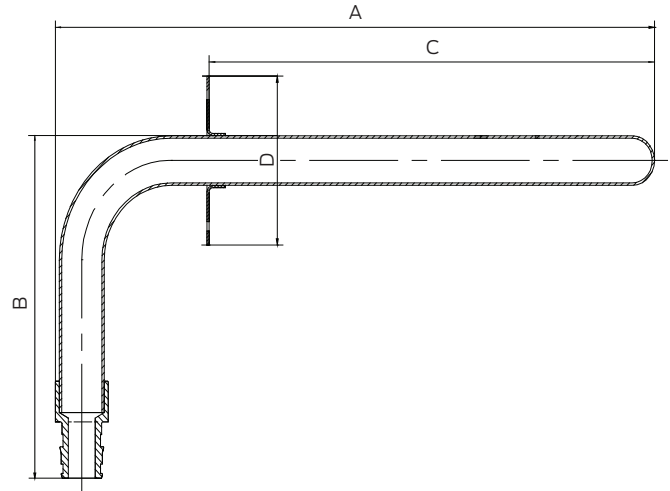

Dimensions (inches)

Part #	Size	A	B	C	D
UAB23070	1/2" (3" x 6")	8.30	4.31	6.10	2.14
UAB26060LF	1/2" (8")	8.00	-	-	-
UAB26061LF	1/2" (3" x 4")	4.00	3.00	-	-
UAB26062LF	1/2" (3-1/2" x 8")	8.00	3.50	-	-
UAB26072LF	3/4" (4" x 8")	8.00	4.00	-	-
UAB26084LF	1" (13" x 16")	16.00	13.00	-	-

Product Submittal

Name	
Date	
Architect/Owner	
Contractor	
Tag	
Notes	